
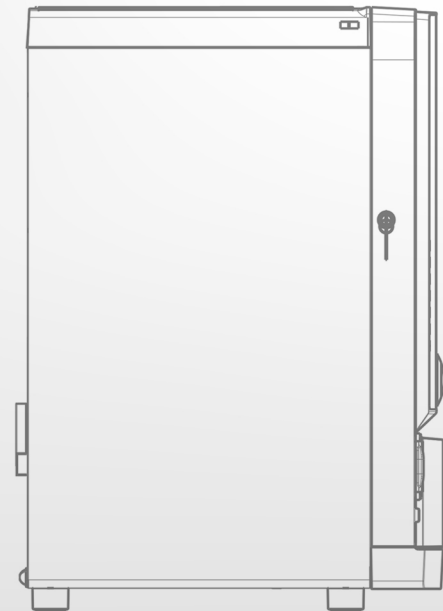


technical data

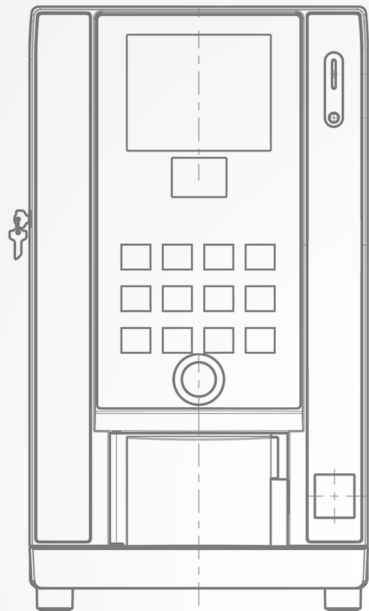

	doppio&cup espresso	doppio&cup instant
Main		
Brewer Variflex	v	-
Cups dispenser	v	v
Cups station	closed	closed
Cup sensor	v	v
Water supply	plumbed	plumbed
Sizing (no. consumption day)	80 (up to 100)	80 (up to 100)
Selections		
Buttons	up to 12	up to 12
Touch panel - pre-sel/direct no.	2-4*8/12	2-4*8/12
Sugar level buttons	2	2
Cups capacity		
plastic	ø 70-265 / ø 73-210	ø 70-265 / ø 73-210
paper	ø 70-160 / ø 73-160 / ø 80-125 *	ø 70-160 / ø 73-160 / ø 80-125 *
Technical Data		
Height (mm)	832	832
Depth (mm)	617	617
Width (mm)	476	476
Weight (mm)	66,4	56,5
Max no. canisters	1+5(S+S+S+S+S)/1+4(S+S+S+B)/1+3(S+B+B)	7(S+S+S+S+S+S) + 6(S+S+S+S+B)
Max no. mixing bowls	3	4
Boiler	1	1
Boiler capacity (lt)	1 x 0,4 or 1x 0,8	1 x 3,4
Electrical supply (volts/Hz)	230/50-60	230/50-60
Power (W)	1 x 1600 or 1 x 2100	1 x 1700
Plug type	schüco 10 A	schüco 10 A
Stirrers (90-105-115 mm)	max. 265	max. 265
Colour		
Panel	white / black	white / black
Canister Capacity (kg)		
Coffee Beans	1 x 1,5	-
Instant coffee	small 0,53/ big 1,1	small 0,53/ big 1,1
Milk	small 0,6/ big 1,30	small 0,6/ big 1,30
Chocolate	small 1,5/ big 3,3	small 1,5/ big 3,3
Tea	small 2/ big 4,3	small 2/ big 4,3
Sugar	small 2/ big 4,3	small 2/ big 4,3
Orzo	small 0,55/ big 1,15	small 0,55/ big 1,15
Ginseng	small 1,65/ big 3,5	small 1,65/ big 3,5
Exhausted pads	70	-
Options		
Tm-on	v	v
Rfid	v	v
Direct hot Water	v	v
Payment systems	v	v
Accessories		
Modul<on cups	v	v
Modul<on water	v	v
Modul<on dispenser	v	v
Modul<on change-giver	v	v
Modul<on Unibase	v	v

* cups capacity can vary according to the model and to the pitch of the cup

last update 10/2015

Rheavendors group reserves the right to change the technical features, colors and design of the machine without prior notice.